



ASSEMBLY INSTRUCTION:
READ AND SAVE THE INSTRUCTIONS.

⚠ WARNING Failure to read and carefully follow all instructions could result in fire or serious bodily injury or death.

⚠ WARNING To avoid in shock, fire or serious bodily injury or death it is very important that the electricity servicing the fixture is turned off before and during installation.

CAREFULLY READ ALL INSTRUCTIONS PRIOR TO ASSEMBLY. Because this fixture is connected to live electrical wires, it is strongly recommended to consider installation by a licensed electrician.

THIS FIXTURE SHOULD TAKE APPROXIMATELY 10 MINUTES TO ASSEMBLE.

MAKE SURE ALL PARTS ARE FIRMLY TIGHTENED.


TOOLS: You will need following tools or equipment:
 ladder, screwdriver, adjustable wrench.

UNPACK THE FIXTURE: You should have received the following parts in the package: canopy, extension pipes-12" - 6 pc. & 6" - 2 pc. To protect the finish, place all parts on a soft surface.

MOUNTING HARDWARE PACKAGE: (2) 1-4 x 1-1/4" screw.
 (2) Plastic wall Anchor, (2) P3 Connectors, (1) P2 Connector,
 (2) Bush, (2) Nuts, (2) Star Washer.

FIXTURE ASSEMBLY:

Determine the length of extension pipes required to hang the fixture at the desire height, remove or add pipes as desired. Use same no. of pipes of equal length of each side. Screw the desired no. of pipes with one another on both the sides. Thread fixture wire up through the extension pipes on both side. Screw the extension pipe at the bottom on to the fixture lamp. Attach the canopy to the top pipe and then screw with the nut.

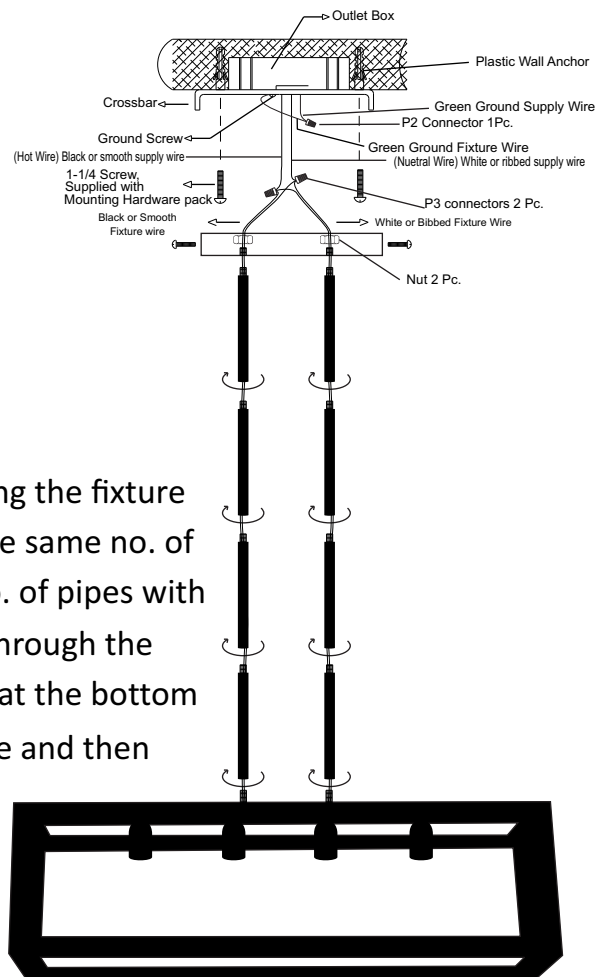

ASSEMBLY INSTRUCTION:




READ AND SAVE THE INSTRUCTIONS.

⚠ THIS PRODUCT IS FOR INDOOR USE ONLY! OUTDOOR USE COULD RESULT IN SHOCK, FIRE OR SERIOUS BODILY INJURY OR DEATH. ALL WIRING MUST BE DONE IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRIC CODES. IT IS STRONGLY RECOMMENDED THAT YOU USE A QUALIFIED ELECTRICIAN.

⚠ WARNING THIS FIXTURE MUST BE MOUNTED TO A UL LISTED OUTLET BOX CAPABLE OF SUPPORTING THE FIXTURE. FAILURE TO FOLLOW THIS REQUIREMENT COULD RESULT IN THE FIXTURE FALLING CAUSING SERIOUS BODILY INJURY OR DEATH.

⚠ WARNING TO AVOID SHOCK, FIRE OR SERIOUS BODILY INJURY OR DEATH IT IS VERY IMPORTANT THAT THE ELECTRICITY SERVICING THE FIXTURE IS TURNED OFF BEFORE AND DURING INSTALLATION.

1. Attach the cross bar to the ceiling outlet box using the two screw provided with the outlet box. (Note : If the screws with the outlet box are too short, use the (2) 1-4 x 1-1/4" screws provided in the mounting hardware package).
ceiling and attach the cross bar to the ceiling using the two screw provided with the mounting hardware pack.
2. Connect the white or ribbed fixture wire to the white supply wire in the outlet box using the P3 wire connectors provided. Connect the black or smooth fixture wire to the black supply wire in the same manner. Install the fixture Supply Ground Wire under the green group screw on the crossbar then connect the fixture Supply Ground Wire to the supply the Supply Ground Wire in the outlet box using the P2 wire connector provided.
3. Tuck the wires carefully inside the outlet box. Spread the electrical splices so that the black wires are on one side of the outlet box and the white wires are on the other side. Next raise the canopy to the ceiling and attach back to cross bar by using two screw provided with the canopy.

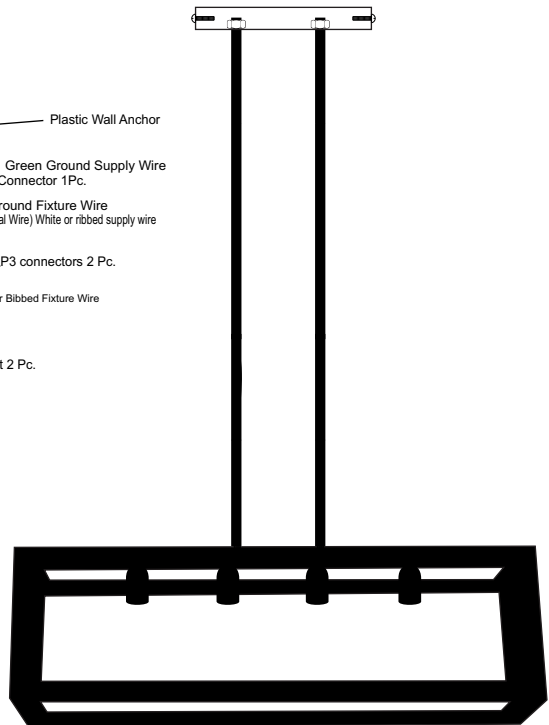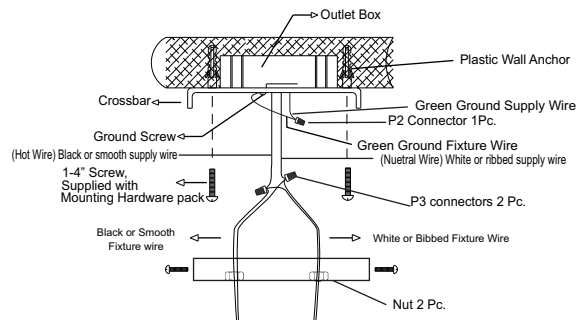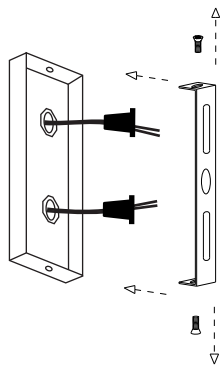

FINAL ASSEMBLY

1. Install a 60 watt max. Medium base type "A" bulb (not included) into each socket.

⚠ WARNING Installation of a bulb exceeding 60 watts maximum could result in fire, serious bodily injury or death.

2. Restore power after installation is fully complete. Your fixture is ready for use.